


# OSW Open-frame Orbital Weld Heads

## Dimensions chart

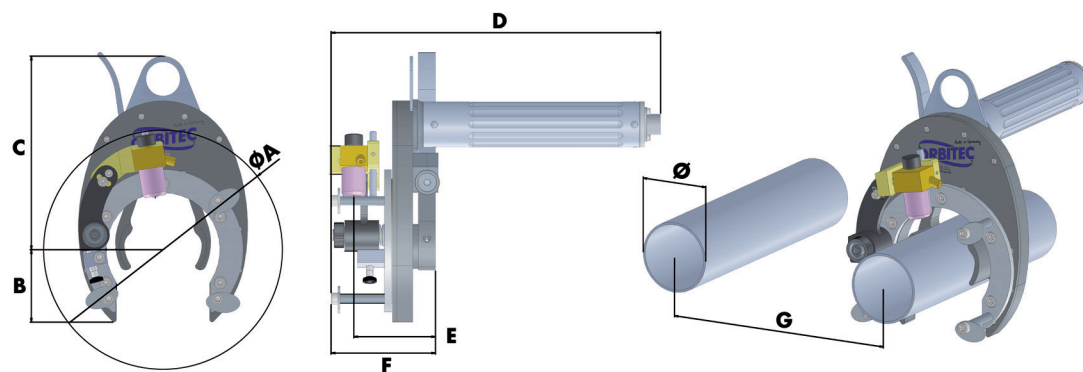

$$G = (\emptyset + A\emptyset) / 2$$

|          | OSW 40 |        | OSW 80 |        | OSW 115 |        |
|----------|--------|--------|--------|--------|---------|--------|
|          | mm     | inch   | mm     | inch   | mm      | inch   |
| <b>A</b> | 120    | 4.724  | 210    | 8.268  | 243     | 9.567  |
| <b>B</b> | 40     | 1.575  | 64     | 2.52   | 90      | 3.543  |
| <b>C</b> | 145    | 5.709  | 171    | 6.732  | 210     | 8.268  |
| <b>D</b> | 310    | 12.205 | 290    | 11.417 | 290     | 11.417 |
| <b>E</b> | 81     | 3.189  | 69     | 2.717  | 69      | 2.717  |
| <b>F</b> | 91     | 3.583  | 91     | 3.583  | 91      | 3.583  |

|          | OSW 170 |        | OSW 275 |        |
|----------|---------|--------|---------|--------|
|          | mm      | inch   | mm      | inch   |
| <b>A</b> | 310     | 12.205 | 465     | 18.307 |
| <b>B</b> | 134     | 5.276  | 180     | 7.086  |
| <b>C</b> | 266     | 10.472 | 410     | 16.141 |
| <b>D</b> | 290     | 11.417 | 310     | 12.204 |
| <b>E</b> | 69      | 2.717  | 105     | 4.133  |
| <b>F</b> | 91      | 3.583  | 125     | 4.921  |